


UL Recognised Single Conductor Cables Insulated in 200 °C Silicone Product Range: *ULSIL*



SCHEMATIC DRAWINGS

Single core construction

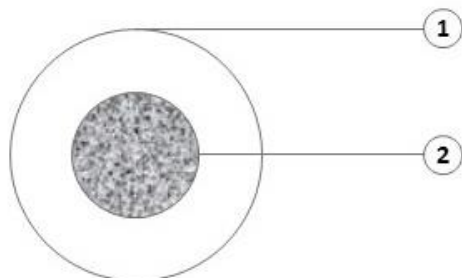

CABLE CONSTRUCTION

1. 200 °C Silicone insulation
2. Tinned copper core

Characteristics

Voltage Rating (U₀/U):	600V
Working Temperature:	200 °C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Outer Diameter [mm]	Colour
ULSIL-002	18 AWG	7 x 0.40	2.9 ± 0.2	Optional*
ULSIL-003	16 AWG	11 x 0.40	3.2 ± 0.2	Optional*
ULSIL-004	14 AWG	17 x 0.40	3.6 ± 0.2	Optional*

* **Colour options:** white, black, green/yellow

Cable Standards	UL style 3135
Stranding of Conductor	Tinned Copper
Insulation	200 °C Silicone insulation

Revision Date:
18/08/2017

Issue No.
1.0

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.