


Round 18AWG UL Style Twisted Cord Overbraided in Viscose Rayon Product Range: *BTW*

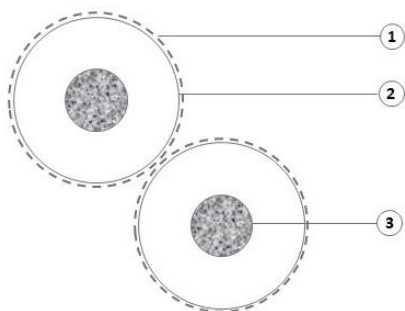

CABLE CONSTRUCTION

1. Viscose rayon/polyester braid
2. 105 °C PVC sheath
3. Stranded tin-plated copper conductor

USE

This product is designed for use in special applications, similar to SPT-2.

Characteristics

Working Voltage:	300 V _{ac}
Working Temperature:	105 °C



File No. E515705

Flexform Product Code	Size Conductor [AWG]	Conductor Strand [mm]	Outer Diameter [mm]
BTW-955	2 x 18	28 x 0.193	5.5 ± 0.2

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours. Please contact us for a list of available colours.

Cable Standards

AWM Style 22310
Flexible Cords and Cables UL 62.
Appliance Wiring Material UL 758.

Stranding of Conductor

18AWG, stranded, round.

Insulation

Labelled AWM Style 1015.
Conductor requirements same as SPT-2.

Cable Assembly

Two single conductors, employing insulation and covering, twisted together. Length of lay of conductors 2.25 inches.

Core Identification

2 Core: Black ● White ○

Revision Date:
20/08/2020

Issue No.
1.0

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.