


## Braided Flat SPT-1-B PVC Power Cable Product Range: *BOV*



### CABLE CONSTRUCTION

1. Marking tape
2. Viscose Rayon/Polyester Braid
3. Tin-plated copper conductor
4. PVC SPT-1 insulation

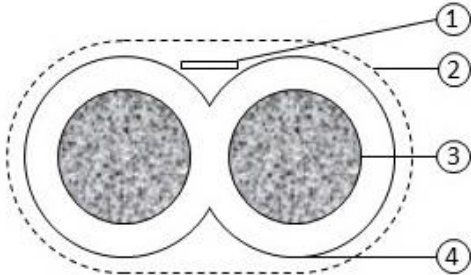

### Characteristics

<b>Working Voltage:</b>	300V
<b>Working Temperature:</b>	+105°C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Shape	Dimensions [mm]
BOV-924	2 x 18	48 x 0.15	Flat	3.3 x 5.5

All versions of this cable can be ordered with a plain or patterned viscose rayon or polyester textile braid, available in over 60 colours. Please contact us for a list of available colours.

<b>In conformity to the standards:</b>	UL 62/1581, CSA 22.2
<b>Type of Conductor:</b>	Tin-plated copper conductor.
<b>Type of Insulation:</b>	PVC SPT-1 105 C type insulation.
<b>Type:</b>	SPT-1-B
<b>Type of Covering:</b>	Viscose rayon or polyester textile braid.
<b>Size:</b>	2 x 18 AWG.
<b>Application:</b>	Flexible Cord

Affix label here

Date: \_\_\_\_\_

- cULus approval printed on marking tape below textile braid

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*