


Braided Flat SPT-2-B PVC Power Cable Product Range: *BOV*



CABLE CONSTRUCTION

1. Marking tape
2. Viscose Rayon/Polyester Braid
3. Tin-plated copper conductor
4. PVC SPT-2 insulation

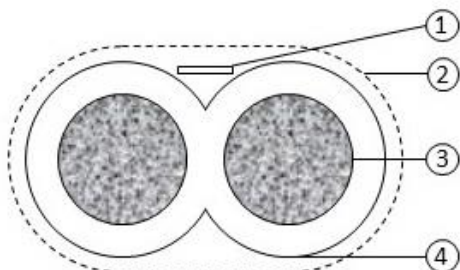

Characteristics

Working Voltage:	300V
Working Temperature:	+105°C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [Nº x mm]	Shape	Outer Diameter [mm]
BOV-925	2 x 18	48 x 0.15	Flat	4.1 x 7.7 ± 0.2

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours. Please contact us for a list of available colours.

In conformity to the standards:

UL 62/1581, CSA 22.2

Type of Conductor:

Tin-plated copper conductor.

Type of Insulation:

PVC SPT-2 105 C type insulation.

Type:

SPT-2-B

Type of Covering:

Viscose rayon or polyester textile braid

Size:

2 x 18 AWG

Application:

Flexible Cord.

Affix label here

Date: _____

- cULus approval printed on marking tape below textile braid.

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.