


## Braided Round PVC + PVC SVT Power Cable Product Range: *BOV*



### CABLE CONSTRUCTION

1. Marking Tape
2. PVC SVT HT 105 insulation
3. Red copper conductor
4. PVC insulation
5. Viscose rayon or polyester textile braid.

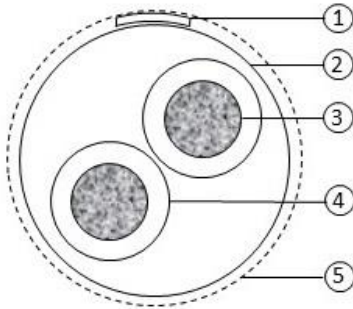

### Characteristics

<b>Working Voltage:</b>	300V
<b>Working Temperature:</b>	105°C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Shape	Outer Diameter [mm]
BOV-926	2 x 18	48 x 0.15	Round	6.7 ± 0.2

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours.  
Please contact us for a list of available colours.

<b>In conformity to the standards:</b>	UL 62/1581 CSA 22.2
<b>Type of Conductor:</b>	Red copper stranded conductor.
<b>Type of Insulation:</b>	PVC + PVC SVT type insulation.
<b>Type:</b>	SVT-B HT 105.
<b>Core Colours:</b>	<b>2 Core:</b> Black ● White ○
<b>Sheath Colour:</b>	Black
<b>Type of Covering:</b>	Polyester or viscose rayon textile braid.
<b>Application:</b>	Flexible jacketed cord.



- cULus approval printed on marking tape below textile braid.

Date: \_\_\_\_\_

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*