


Braided Double Insulated PVC/FEP Twin Twisted Flex Product Range: *BTWF*



SCHEMATIC DRAWING

2 core construction

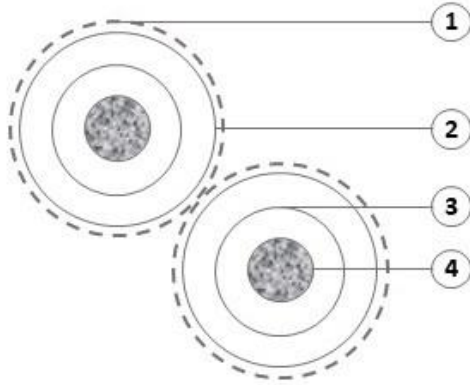

CABLE CONSTRUCTION

1. Viscose Rayon braid
2. 105 °C transparent PVC outer insulation
3. R5F type FEP inner insulation
4. Electrolytic tinned flexible copper conductor

APPLICATIONS

This product is designed for use as a pendant drop or table and floor lamps. Approval for rise and fall applications should be confirmed with ourselves prior to adoption.

Characteristics

<u>Characteristics</u>	
Rated Voltage:	300/500 V _{ac}
Test Voltage:	2500 V _{ac}
Temperature Range:	-55 °C ÷ 180 °C (only on inner insulation) -20 °C ÷ 105 °C (at outer insulation)
Short-circuit Temperature:	160 °C
Minimum Bending Radius:	14 x Overall Diameter

Revision Date:
06/09/2021

Issue No.
1.2

Page:
1 of 2

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.

Size Conductor [mm ²]	Conductor Stranding [N° x mm]	Electrical Resistance [Ω/Km]	Diameter on Insulation		Radial Thickness of Insulation	
			1 st Insulation	2 nd Insulation	1 st Insulation	2 nd Insulation
0.75	19 x 0.224	≤ 26.7	1.55 ± 0.05	2.5 ± 0.1	≥ 0.20	≥ 0.50

Flexform Product Code	Size Conductor [mm ²]	Outer Diameter [mm]
BTWF-353	2 x 0.75	5.6 ± 0.5

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours.
Please contact us for a list of available colours.

Cable Standards	Low Voltage European Directive No. 2014/35/UE.
Stranding of Conductor	Electrolytic tinned flexible concentric rope copper conductor.
Inner Insulation	R5F type FEP conforming to EN 50363-0 requirements.
Outer Insulation	105 °C rated PVC, hardness: [87 ± 2] Sh-A.
Cable Assembly	The cores are braided in viscose rayon before being twisted together.
Core Identification	2 Core: Brown ● Blue ●

Revision Date:
06/09/2021

Issue No.
1.2

Page:
2 of 2

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.