


## Braided Double Insulated FEP/PVC Triple Twisted Flex Product Range: *BTPF*



### SCHEMATIC DRAWING

3 core construction

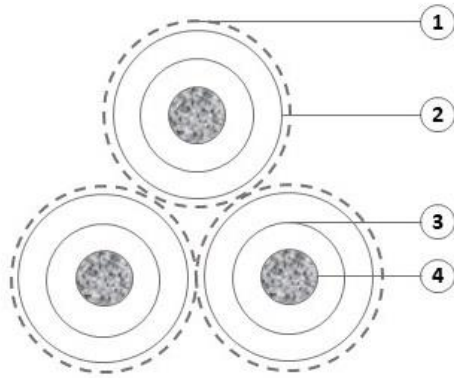

### CABLE CONSTRUCTION

1. Viscose Rayon braid
2. 105 °C transparent PVC outer insulation
3. R5F type FEP inner insulation
4. Electrolytic tinned flexible concentric rope copper conductor

### APPLICATIONS

This product is designed for use as a pendant drop or table and floor lamps. Approval for rise and fall applications should be confirmed with ourselves prior to adoption.

<b>Characteristics</b>	
<b>Voltage Rating (U<sub>0</sub>/U):</b>	300 / 500 V <sub>ac</sub>
<b>Test Voltage:</b>	2500 V
<b>Temperature Range:</b>	-55 °C ÷ 180 °C (inner insulation only) -20 °C ÷ 105 °C (at outer insulation)
<b>Short-circuit Temperature:</b>	160 °C
<b>Minimum Bending Radius:</b>	14 x Overall Diameter

Revision Date:  
06/09/2021

Issue No.  
1.2

Page:  
1 of 2

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*

Size Conductor [mm <sup>2</sup> ]	Conductor Stranding [N° x mm]	Electrical Resistance [Ω/Km]
0.75	19 x 0.224	≤ 26.7

Flexform Product Code	Size Conductor [mm <sup>2</sup> ]	Outer Diameter [mm]	Thickness of Jacket [mm]
BTPF-403	3 x 0.75	5.6 ± 0.5	≥ 0.60

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours.  
Please contact us for a list of available colours.

<b>Cable Standards</b>	Low Voltage European Directive No. 2014/35/UE.
<b>Stranding of Conductor</b>	Electrolytic tinned flexible concentric rope copper conductor.
<b>Inner Insulation</b>	R5F type FEP conforming to EN-50363-0 requirements.
<b>Outer Insulation</b>	Transparent 105 °C PVC, hardness: [87 ± 2] Sh-A.
<b>Cable Assembly</b>	The cores are braided in viscose rayon before being twisted together.
<b>Core Identification</b>	<b>3 Core:</b> Brown ● Blue ● Green/Yellow ●

Revision Date:  
06/09/2021

Issue No.  
1.2

Page:  
2 of 2

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*