


Multi-Conductor Cable Insulated in Transparent 180 °C FEP + 90 °C PVC Product Range: *CCF*

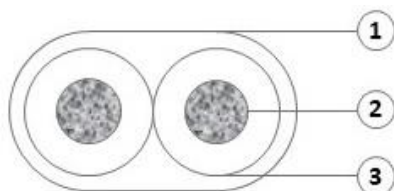

SCHEMATIC DRAWING

Flat 2 core construction

CABLE CONSTRUCTION

1. 90 °C PVC sheath
2. Flexible tinned copper conductor
3. 180 °C FEP insulation



Characteristics

Voltage Rating (U₀/U):	450 / 750 V
Temperature Range:	180 °C (FEP insulated cores) 90 °C (external PVC sheath)

Flexform Product Code	Size Conductor [mm ²]	Conductor Stranding [N° x mm]	Outer Diameter [mm]
CCF-544	2 x 0.75	19 x 0.23	3.0 x 4.7 ± 0.2

Cable Standards Low Voltage European Directive No. 2014/35/UE.

Stranding of Conductor Flexible tinned copper conductor.

Insulation 180 °C FEP insulation.

Core Identification **2 Core:** Transparent ○ Transparent ○

Outer Sheath Clear 90 °C PVC sheath.

Revision Date:
17/03/2022

Issue No.
1.2

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.