


## Flat Multicore Cable With FEP Cores and FEP Sheath Product Range: *MCC*



### SCHEMATIC DRAWING

*2 core construction*

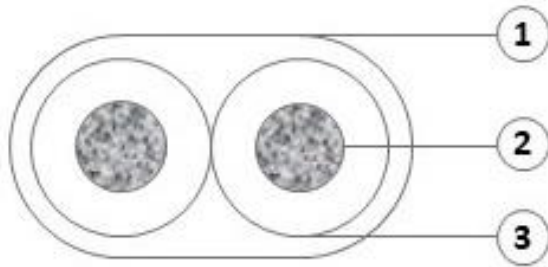

### CABLE CONSTRUCTION

1. FEP Sheath Insulation
2. Tinned flexible copper conductor
3. FEP Cores Insulation

### APPLICATIONS

This product is designed for use as a pendant or a flexible cord for table or floor lamps, or similar light, portable apparatus, where there is a low risk of damage or mechanical abuse.

### Characteristics

<b>Voltage Rating (U<sub>0</sub>/U):</b>	300 / 500 V <sub>ac</sub>
<b>Test Voltage:</b>	2.5 kV
<b>Temperature Range:</b>	-100 °C ÷ + 205 °C

Revision Date:  
14/02/2020

Issue No.  
1.1

Page:  
1 of 2

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*

Size Conductor [mm <sup>2</sup> ]	Conductor Stranding [N° x mm]	Electrical Resistance [Ω/Km]	Thickness of Insulation [mm]
0.75	19 x 0.225	≤ 26.7	0.20

Flexform Product Code	Size Conductor [mm <sup>2</sup> ]	Outer Diameter [mm]	Thickness of Jacket [mm]
MCC-455	2 x 0.75	2.2 x 3.8 ± 0.2	0.30

#### Cable Standards

Conductor: DIN EN 60228 (VDE 0295)  
Insulation: DIN VDE 0207 part 6: 2004-10

#### Stranding of Conductor

Class 5 flexible copper conductor conforming to BS/IEC 60228 standard.

#### Insulation

FEP core insulation

#### Cable Assembly

The cores are parallel.

#### Core Identification

Transparent ○

#### Outer Sheath

FEP sheath insulation

#### Colour of Sheath

Transparent ○

Revision Date:  
14/02/2020

Issue No.  
1.1

Page:  
2 of 2

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*