


UL Recognised Single Conductor Cables Insulated in 200 °C Silicone Product Range: *ULSIL*



CABLE CONSTRUCTION

1. 200 °C Silicone insulation
2. Tin-plated copper core

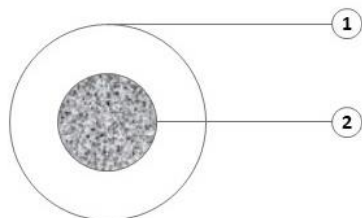

File no: E495477

Characteristics

Working Voltage	600V
Working Temperature:	200 °C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Outer Diameter [mm]	Colour
ULSIL	1 x 18 AWG	7 x 0.40	2.8 ± 0.2	Optional*

* **Colour options:** white, black, green/yellow

In conformity to the standards:

UL 758 AWM Style 3135

Type of conductor:

Tin-plated copper

Type of insulation:

200 °C Silicone insulation

Insulation thickness:

0.76 mm

Flame Test:

FT2

Use:

Internal wiring of appliances where totally enclosed.

AFFIX LABEL HERE

DATE: _____

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.