


## Single Conductor Cables Insulated in 180 °C Silicone Product Range: *SIL*



### SCHEMATIC DRAWINGS

*Single core construction*

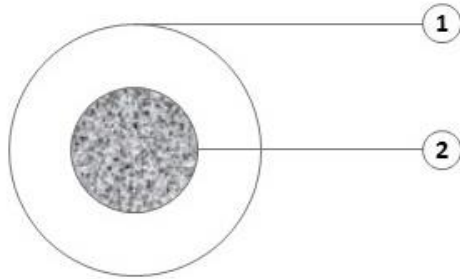

### CABLE CONSTRUCTION

1. 180 °C silicone insulation
2. Tin-plated copper core

### Characteristics

<b>Voltage Rating (U<sub>0</sub>/U):</b>	300/300 V <sub>ac</sub>
<b>Working Temperature:</b>	180 °C

Flexform Product Code	Size Conductor [mm <sup>2</sup> ]	Conductor Stranding [N° x mm]	Outer Diameter [mm]	Colour
SIL-002	1 x 0.50	16 x 0.20	2.2 ± 0.2	Optional*
SIL-003	1 x 0.75	24 x 0.20	2.4 ± 0.2	Optional*

\* **Colour options:** Blue, Brown, Green/Yellow (usually held in stock)  
Red, White, Black (available on request)

<b>Cable Standards</b>	DIN VDE 0250 Part 502: 1985-03 Low Voltage European Directive No. 2014/35/UE.
<b>Stranding of Conductor</b>	Tin-plated copper
<b>Insulation</b>	180 °C Silicone insulation

Revision Date:  
15/08/2022

Issue No.  
1.2

Page:  
1 of 1

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*