


## Multi Conductor Cables Insulated in PVC + PVC 105 °C cULus Product Range: SVT



### CABLE CONSTRUCTION

1. PVC SVT HT 105 insulation
2. PVC insulation
3. Red copper conductor

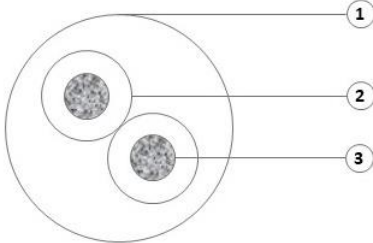

File no: E495477

### Characteristics

<b>Working Voltage:</b>	300 V
<b>Working Temperature:</b>	105 °C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Shape	Outer Diameter [mm]
SVT-2C	2 x 18	48 x 0.15	Round	6.2 ± 0.2

<b>In conformity to the standards:</b>	UL 62/1581 CSA 22.2
<b>Type of Conductor:</b>	Red copper stranded conductor.
<b>Type of Insulation:</b>	PVC + PVC SVT type insulation
<b>Type:</b>	SVT
<b>Core Colours:</b>	2 Core: Black ● White ○
<b>Colour of Sheath:</b>	Black or White
<b>Application:</b>	Flexible jacketed cord.

Affix label here

Date: \_\_\_\_\_

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*