


Multi Conductor Cables Insulated in PVC + PVC 105 °C cULus Product Range: *SJTW*



CABLE CONSTRUCTION

1. PVC SJTW water resistant sheath
2. PVC insulation
3. Red copper conductor

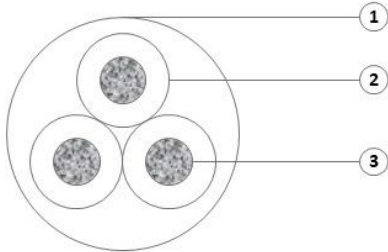

Process Wire Respoled File
no: E495477

Characteristics

Working Voltage:	300 V
Working Temperature:	105 °C for dry locations 60 °C for wet locations

Flexform Product Code	Size Conductor [AWG]	Conductor Strand [No x mm]	Shape	Outer Diameter [mm]
SJTW	3 x 18	28 x 0.193	Round	8.2 ± 0.2

In conformity to the standards:	UL 62/1581 CSA 22.2
Type of Insulation:	PVC + PVC SJTW Water Resistant
Type of Conductor:	Red Copper
Type:	SJT W HT 105
Application:	Flexible jacketed cord.
Core Identification	3 Core: Black ● White ○ and Green ●
Colour of Sheath	Black ●
Size:	3 x AWG 18
Rating:	300 V – DRY 105 C WR 60 C



DATE: _____

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.