


Multi Conductor Cables Insulated in PVC + PVC 105 °C cULus Product Range: *SPT-1*



CABLE CONSTRUCTION

1. PVC SPT-1 insulation
2. Tin-plated copper conductor.

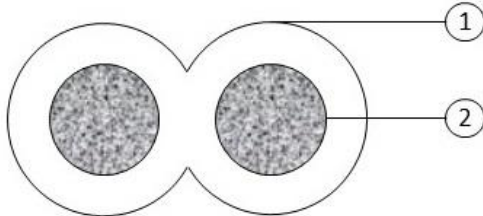

File no: E495477

Characteristics

Working Voltage:	300 V
Working Temperature:	105 °C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Shape	Outer Diameter [mm]
SPT-1	2 x 18	48 x 0.15	Flat	2.8 x 5.6 ± 0.2

In conformity to the standards:

UL 68/1581, CSA 22.2

Type of Conductor:

Tin-plated copper conductor.

Type of Insulation:

PVC SPT-1 105 C type insulation.

Size:

2 x 18 AWG.

Application:

Flexible cord.

Affix label here

DATE: _____

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.