


## Multi Conductor Cables Insulated in PVC + PVC 105 °C cULus Product Range: SVT



### CABLE CONSTRUCTION

1. PVC SVT HT 105 insulation
2. PVC insulation
3. Red copper stranded conductor

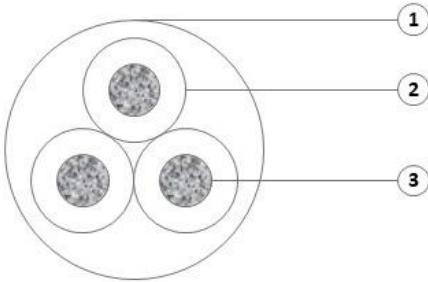

File no: E495477

### Characteristics

<b>Working Voltage:</b>	300 V
<b>Working Temperature:</b>	105 °C

Flexform Product Code	Size Conductor [AWG]	Conductor Strand [No x mm]	Shape	Outer Diameter [mm]
SVT-3C	3 x 18	48 x 0.15	Round	6.6 ± 0.2

<b>In conformity to the standards:</b>	UL 62/1581 CSA 22.2
<b>Type of conductor:</b>	Red copper stranded conductor.
<b>Type of insulation:</b>	PVC + PVC SVT type insulation.
<b>Type:</b>	SVT HT 105
<b>Core Identification</b>	<b>3 Core:</b> Black ● White ○ and Green ●
<b>Colour of Sheath</b>	Black ● or White ○
<b>Application:</b>	Flexible Jacket Cord

Affix label here

DATE: \_\_\_\_\_

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*