


Single Conductor Cables Insulated in 105 °C UL RECOGNISED PVC Product Range: *ULPVC*



CABLE CONSTRUCTION

1. 105 °C PVC insulation
2. Tin-plated copper core

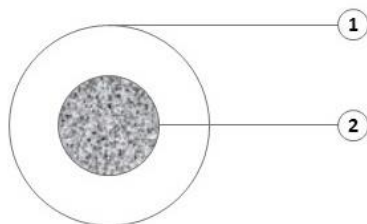

File no: E495477

Characteristics

| | |
|-----------------------------|--------|
| Working Voltage: | 600V |
| Working Temperature: | 105 °C |

| Flexform Product Code | Size Conductor [AWG] | Conductor Stranding [N° x mm] | Outer Diameter [mm] | Colour |
|-----------------------|----------------------|-------------------------------|---------------------|-----------|
| ULPVC-105 | 18 AWG | 28 x 0.193 | 2.9 ± 0.2 | Optional* |

* **Colour options:** White, Black, Yellow/Green

In conformity to the standards: UL 758/1581 CSA C22.2 n. 210.5
AWM style 1015

Type of Conductor: Tin-plated copper conductor.

Type of Insulation 105 °C PVC 0.76 mm insulation.

Type: AWM 1015 VW-1 | A/B FT1

Size: AWG 18 STG

Application: Internal wiring of appliances.

Rating: 600V – 105C

Issue No: SJ-386491



Affix label here

- cURus approval printing on the sheath.

DATE: _____

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.