


Single Conductor Cables Insulated in 105 °C UL RECOGNISED PVC Product Range: *ULPVC*



CABLE CONSTRUCTION

1. 105 °C PVC insulation
2. Tin-plated copper core

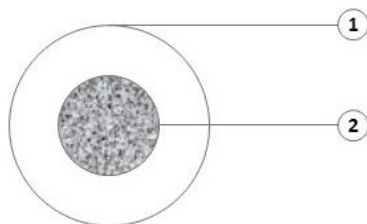

File no: E495477

Characteristics

Working Voltage:	600V
Working Temperature:	105 °C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Outer Diameter [mm]	Colour
ULPVC-105	18 AWG	28 x 0.193	2.9 ± 0.2	Optional*

* **Colour options:** White, Black, Yellow/Green

In conformity to the standards: UL 758/1581 CSA C22.2 n. 210.5
AWM style 1015

Type of Conductor: Tin-plated copper conductor.

Type of Insulation: 105 °C PVC 0.76 mm insulation.

Type: AWM 1015 VW-1 | A/B FT1

Size: AWG 18 STG

Application: Internal wiring of appliances.

Rating: 600V – 105C

Issue No: SJ-386491



- cURus approval printing on the sheath.

DATE: _____

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.