


Flat Multicore Cable with FEP Cores and FEP Sheath Product Range: CCF

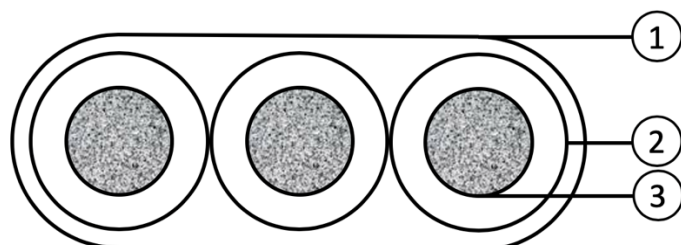

CABLE CONSTRUCTION

1. FEP Sheath Insulation
2. Tinned flexible copper conductor
3. FEP Cores Insulation

Characteristics

Voltage Rating (U₀/U):	450/750 V _{ac}
Temperature Range:	180 °C

Flexform Product Code	Size Conductor [N° x mm ²]	Conductor Stranding [N° x mm]	Outer Diameter [mm]
CCF-534F	3 x 0.75	19 x 0.23	5.8 x 2.5 ± 0.2

Cable Standards

Low Voltage European Directive No. 2014/35/UE.

Stranding of Conductor

Tinned copper conductor

Insulation

FEP core insulation

Cable Assembly

The cores are parallel.

Core Identification

Transparent ○ Green/Yellow ● Transparent ○

Outer Sheath

FEP sheath insulation

Colour of Sheath

Transparent ○

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.