


Mini Crystal Clear for LED Applications Product Range: *MCC*

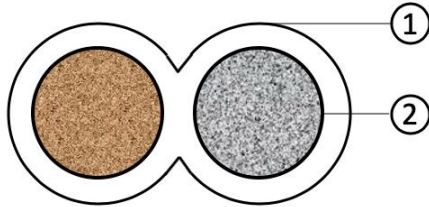

CABLE CONSTRUCTION

1. 90 °C PVC Transparent Sheath Insulation
2. Flexible copper conductor
 - One tinned copper conductor
 - One bare copper conductor

Characteristics

Rated Voltage:	60 V
Temperature Range:	90 °C

Flexform Product Code	Size Conductor [No x mm ²]	Conductor Stranding [No x mm]	Outer Diameter [mm] ± 0.2
MCC-215	2 x 0.15	7 x 0.14	1.3 x 2.8
MCC-225	2 x 0.25	8 x 0.18	1.5 x 3.9

Stranding of Conductor Tinned copper + Bare copper

Insulation 90 °C PVC insulation

Core Identification Transparent over bare copper ○ Transparent over tinned copper. ○

Revision Date:
01/09/2022

Issue No.
1.0

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.