


Flat Multicore Cable with FEP Cores and FEP Sheath Product Range: CCF

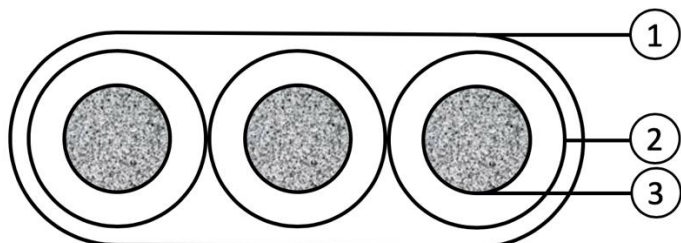

CABLE CONSTRUCTION

1. FEP Sheath Insulation
2. Tinned flexible copper conductor
3. FEP Cores Insulation

Characteristics

Voltage Rating (U₀/U):	450/750 V _{ac}
Temperature Range:	180 °C

Flexform Product Code	Size Conductor [N° x mm ²]	Conductor Stranding [N° x mm]	Outer Diameter [mm]
CCF-534F	3 x 0.75	19 x 0.23	5.8 x 2.5 ± 0.2

Cable Standards Low Voltage European Directive No. 2014/35/UE.

Stranding of Conductor Tinned copper conductor

Insulation FEP core insulation

Cable Assembly The cores are parallel.

Core Identification Transparent Green/Yellow Transparent

Outer Sheath FEP sheath insulation

Colour of Sheath Transparent

Revision Date:
03/10/2022

Issue No.
1.0

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.