


## Braided Festoon Lighting Cable Product Range: *FEST*

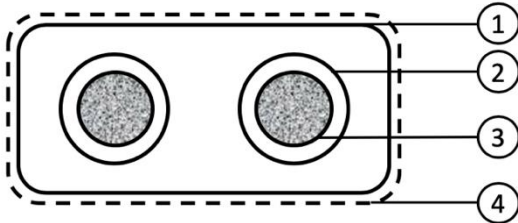

### CABLE CONSTRUCTION

1. Viscose Rayon or Polyester braid
2. PVC insulation
3. A bare copper conductor
4. PVC jacket

### APPLICATIONS

Festoon cables are usually installed in temporary installations and are produced to accept quick connect lamp holders which can be fitted at intervals along its length. Braided cable is suitable for indoor applications only.



### Characteristics

<b>Service Voltage:</b>	600/1000 V
<b>Test Voltage:</b>	3500 V
<b>Temperature Range:</b>	-25 °C to 70 °C

Flexform Product Code	Size Conductor [mm <sup>2</sup> ]	Conductor Stranding [N° x mm]	Outer Diameter [mm] ± 0.2
FEST-OB	2 x 2.50	7 x 0.67	5 x 11

This cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours. Please refer to colour chart for available shades.

Insulation	Halogen-free PVC
Cable Assembly	The cores are parallel
Core Identification	2 Core: Brown ● and Blue ●
Outer Sheath	Halogen-free PVC
Colour of Sheath	Black ●

Revision Date:  
22/07/2022

Issue No.  
1.0

Page:  
1 of 1

*In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.*